

Reamers are designed to cut smooth Finishes and Accurate holes with maximum Tool Life and are more economical in Large production.

REAMERS




(Straight & Taper shank)



Diameter		Tip-L	OAL	Teeth	Taper
MM	INCH	L1	L	T	MT
6,7	1/4, 9/32	19	150	4	1
8,9	5/16, 11/32	19	160	4	1
10,11	3/8, 7/16	19	170	4	1
12	1/2	22	180	6	1
13,14,15	9/16, 19/32	22	180	6	2
16,17,18	5/8, 11/16, 23/32	25	200	6	2
19,20,21	3/4, 25/32, 27/32	25	225	6	2
22,23	7/8, 29/32	25	235	6	3
24,25,26	15/16, 1-1/32	25	250	8	3
27,28	1-1/16, 1-3/32	30	265	8	3
29,30,31,32	1-5/32, 1-3/16, 1-7/32, 1-1/4	30	280	8	3

Diameter		Width	Bore	Teeth
MM	INCH	MM	INCH	MM
80	3"	6	1/4	27
		8	5/16	27
		10	3/8	27
		12	1/2	27
100	4"	8	5/16	32
		10	3/8	32
		12	1/2	32
		16	5/8	32
125	5"	10	3/8	32
		12	1/2	32
		16	5/8	32
		20	3/4	32

These Cutters are made from heat Treated alloy steel Bodies and have the hole and hub precision ground



SIDE & FACE CUTTERS




These cutters have the Characteristics of a Side & Face Cutter with a Straight shank/Taper Shank for holding and driving.

T. SLOT CUTTERS



(Straight & Taper shank)

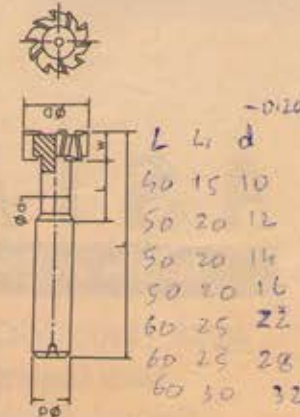

Diameter	Width	Teeth	Shank dia
MM	MM		
18	8	4	12
21	9	4	12
25	10	4	16
32	14	6	16
40	18	6	25
50	22	6	32
60	28	6	32